

PNEUMATIC CONTROL BOX

8 Bank Air Control

Locally Assembled

Designed for truck and trailer applications, the OMFB 8 Bank Air Control provides reliable and centralised management of up to eight pneumatic functions including PTO, tipping, dolly lock, and tailgate operations. Built from stainless steel and assembled in Australia, it integrates seamlessly with OMFB and Sistematica control systems for durable, efficient performance in demanding environments.

- **Controls 8 pneumatic functions** – PTO, Dolly Lock, Truck/Tailer Tip (Up/Down), and Tailgate operations
- **Stainless-steel housing** – corrosion-resistant and durable for harsh conditions
- **Pre-assembled solenoid valve bank** – ready for installation
- **Voltage options:** 12VDC or 24VDC (±10%)
- **Fittings:** Metric (6mm) or Imperial (¼")
- **Direct-acting 3/2 poppet valves** – suitable for both pressure and vacuum applications
- **Manual overrides and custom function labels** available
- **IP65 rating** – full box assembly protection
- **Working pressure:** -10 psi to +150 psi (max. 212 psi)
- **Flow rate:** 70–100 L/min @ 110 psi (max. airflow 500 L/min)
- **Filtration:** 40 µm dry type – no lubrication required
- **Operating temperature:** up to +70°C
- **Assembled in Australia** – designed for performance and longevity




Part Number	Functions	Voltage	Fitting
BX12IP08000	8	12V	Imperial – ¼"
BX12MT08000	8	12V	Metric – 6mm
BX24IP08000	8	12V	Imperial – ¼"
BX24MT08000	8	12V	Metric – 6mm

8 Bank Air Control pneumatic solenoid box

Locally Assembled

Dimensions

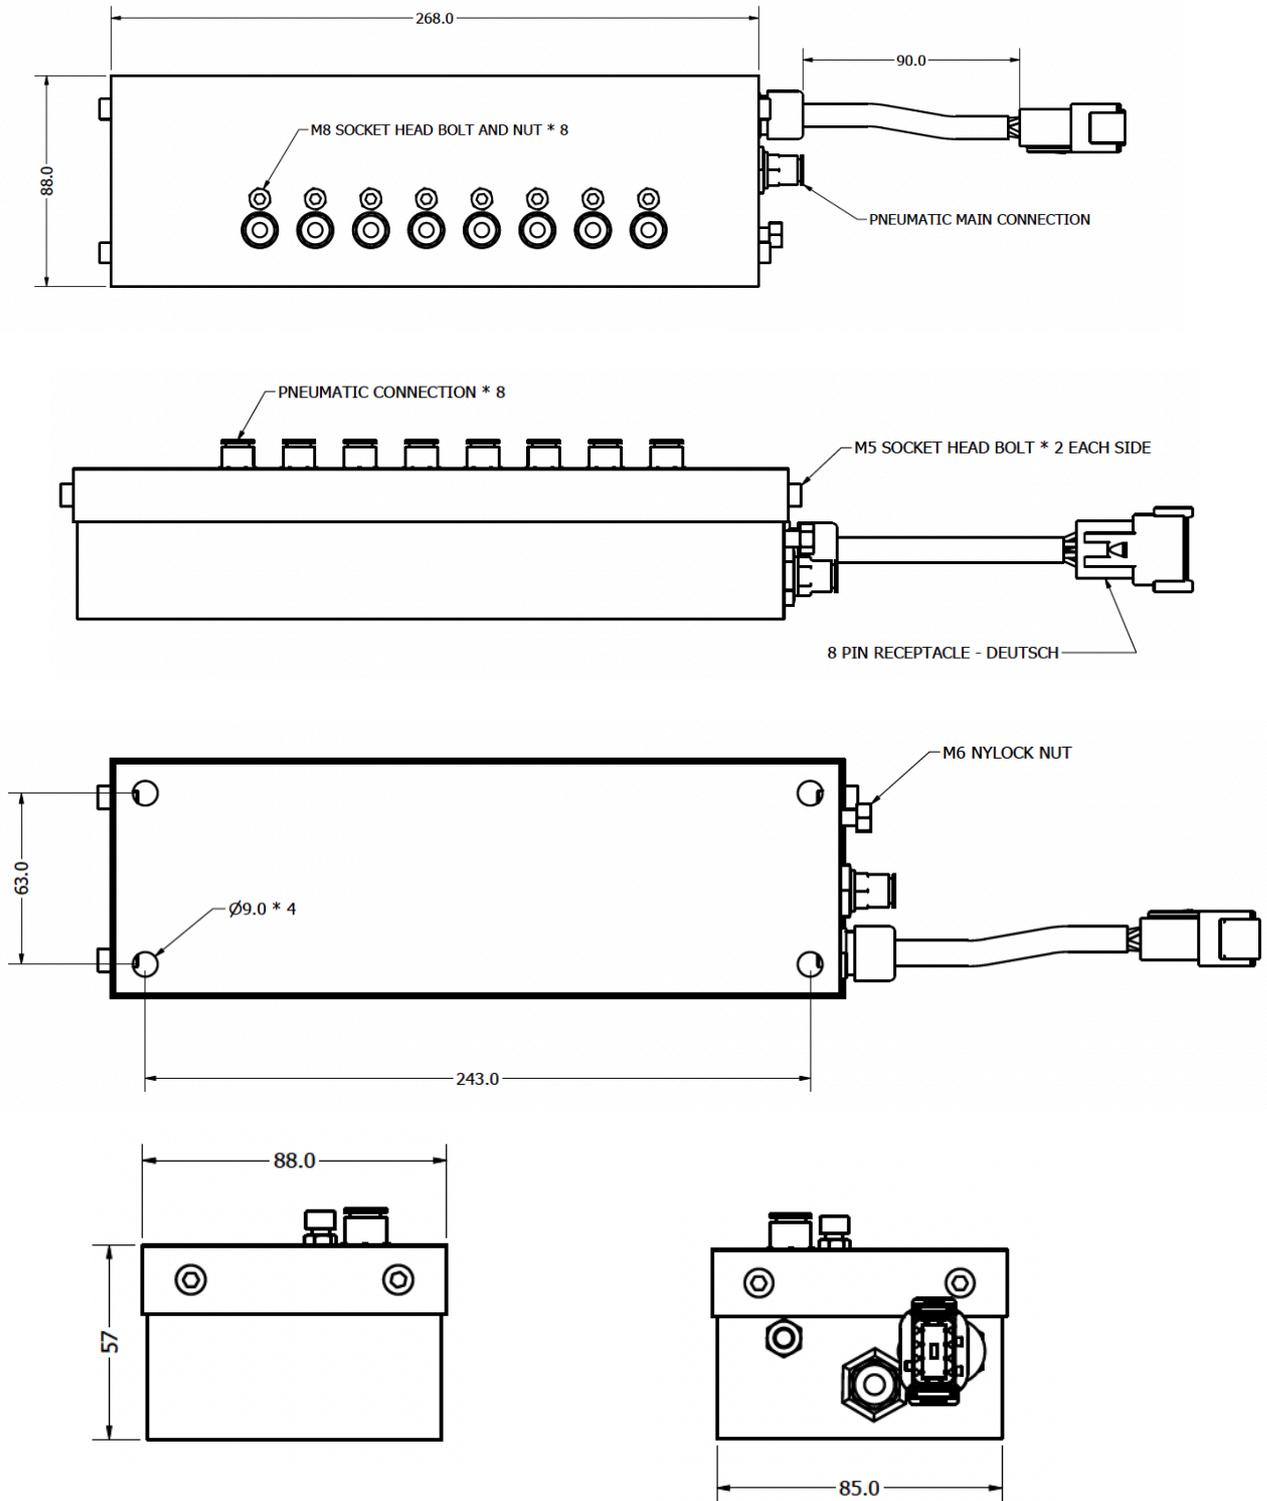

OMFB_Pacific_Pneumatic_Control_Box_REV1.09/10/2025